


Ampacoll® XT dsl

Double-slit acrylic adhesive tape for indoor and outdoor use

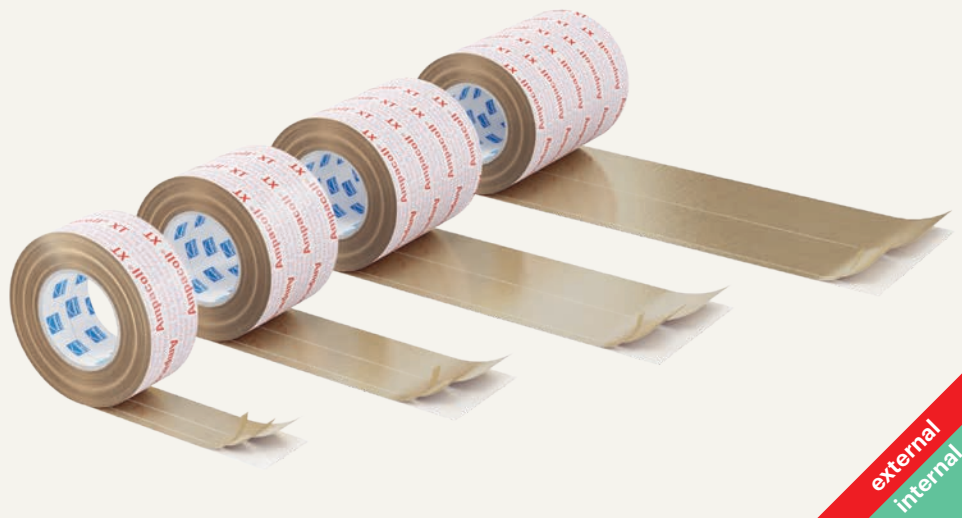

- > Diffusion-permeable carriers
- > Keeps its shape thanks to tear-resistant carrier
- > Maximum adhesive power at temperatures from as low as -5°C
- > Extremely robust and durable
- > Tyvek®-carrier is watertight and will not rot

Technical details	Value	Standard
Storage	Cool and dry	
Application temperature	from -5 °C	
Temperature resistance	-40 to +100 °C	
Resistance to ageing	>20 years	
Natural weathering period	4 months (without mechanical stress)	



Area of application: For airtight and windproof masking of rafter and right-angle connections and for window adhesion outdoors.

Delivery forms			
Item no.	Identification	Roll size	Box contents
7640115533807	Ampacoll® XT 60 double-slit	25m×60mm×0.3mm Slit: 12mm, 30mm	10 rolls = 250 metres
7640115535979	Ampacoll® XT 100 double-slit	25m×100mm×0.3mm Slit: 12mm, 50mm	4 rolls = 100 metres
7640115536006	Ampacoll® XT 150 double-slit	25m×150mm×0.3mm Slit: 12mm, 75mm	4 rolls = 100 metres

Application photos



Window installation – 12 mm for sticking the adhesive tape to the window frame, then the rest (48 mm) on the embrasure

- > Connection of windproofing to the outside of window frames



Adhesion to corners and angles – 30 mm on one side, and 30 mm on the other

- > Adhesion of element corners in wooden buildings
- > Adhesion of board joints in corners
- > Rafter, bar and beam penetrations outdoors (patchwork)
- > Connecting windproofing to penetrations
- > All corner and angle adhesions indoors and outdoors

Application tips

Tear-resistant acrylic adhesive tape, ideal for outdoor use. Split paper liner for easy, staged fixing of the adhesive tape to the component. Makes work easier and quicker and increases the adhesive quality as the adhesive tape sticks and remains where it is meant to be.

Ampacoll® XT adheres immediately to the surface it is intended for. It can largely withstand normal weather conditions for four months. Please ensure that once they have

been masked with the tape, the joints are not damaged mechanically (e.g. by objects being dragged across them).



Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at www.ampack.biz

Sales via specialist dealers

Ampack Switzerland: 071 858 38 00
Ampack Austria: 05523 53433
Ampack Germany: 07621 1610264
Ampack France: 04 50 83 70 54
Ampack Italy: 0471 053 475

www.ampack.biz



The following information may have been superseded by new findings or developments. Current information can be found at www.ampack.biz. © Ampack AG, Rorschach, 09.2022

5001EU/D25.00HW(VS)0922